

WIREMIKE

Stainless Steel Wire Micrometer

Available in Inch or Decimal format

- Strong, durable, high quality
- Measures I.D. and O.D. of tubing
- Measures thin-wall and rigid conduit including IPS
- Measures ACSR, stranded and solid commercial cables
- Use as caliper or ruler

For Use On:

ACSR

#6 to 336.4 (26/7) Stranded

Stranded AWG

#18 to 2000 kcmil

Solid

#20 to 4/0 AWG

IPS Tubing (Cu/Al) and Rigid Conduit:

1/4" to 2-1/2"

Tubing Sizes:

3-1/8" inside maximum; 2-15/16" outside maximum

Thin-wall Conduit:

3/8" to 2-1/2"

Variations:


WIREMIKE Stainless Steel WIREMIKE™ with inch/fraction markings

WIREMIKE-D Stainless Steel WIREMIKE™ with decimal markings

RK194-2 Convenience packaging of WIREMIKE (with inch markings) in packaging suitable for hanging on a rack; sold in multiples of 10 only



WIREMIKE

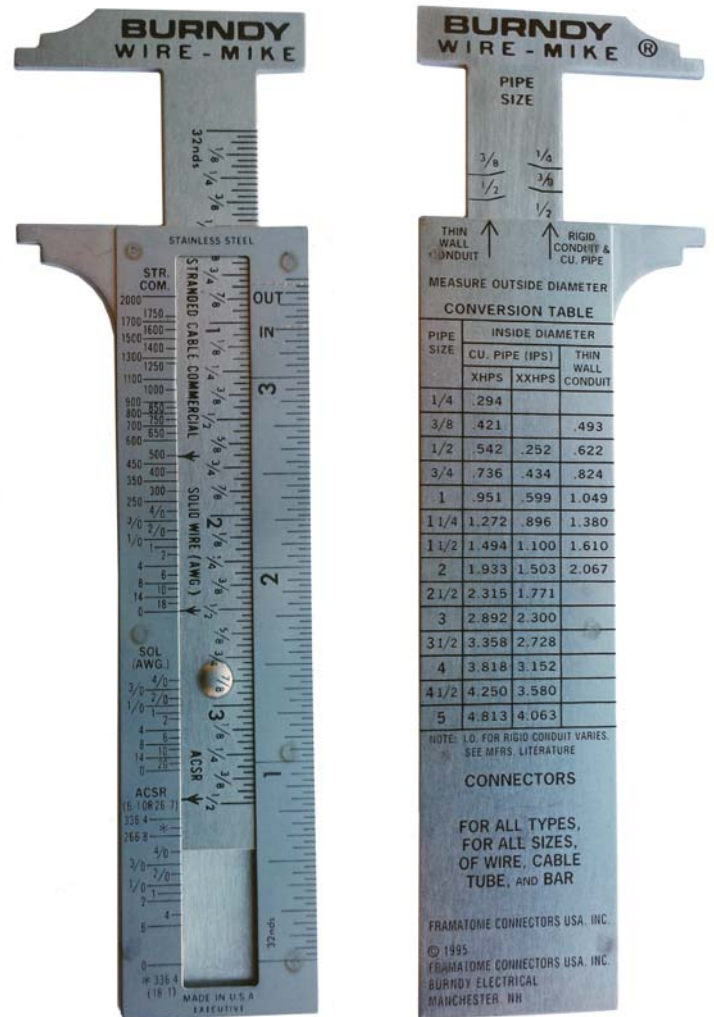

MEASURE OUTSIDE DIAMETER

CONVERSION TABLE

PIPE SIZE	INSIDE DIAMETER	
	CU. PIPE (IPS)	THIN WALL CONDUIT
1/4	.294	
3/8	.421	.493
1/2	.542	.622
3/4	.736	.824
1	.951	1.049
1 1/4	1.272	1.380
1 1/2	1.494	1.610
2	1.933	2.067
2 1/2	2.315	1.771
3	2.892	2.300
3 1/2	3.358	2.728
4	3.818	3.152
4 1/2	4.250	3.580
5	4.813	4.063

NOTE: I.D. FOR RIGID CONDUIT VARIES. SEE MFRS. LITERATURE

CONNECTORS

FOR ALL TYPES, FOR ALL SIZES, OF WIRE, CABLE TUBE, AND BAR

FRAMATOME CONNECTORS USA, INC.
© 1995
FRAMATOME CONNECTORS USA, INC.
BURNNDY ELECTRICAL
MANCHESTER, NH